

# CLEANING SOLUTION

H4ANC(R)

Hardt's 'Cleaning Solution' utilizes a gentle patented detergent to crystalize and dissolve burnt-on grease and carbon from cooking accessories such as skewers, pans, baskets, racks as well as ventilation hood filters.





#### Hardt Detergent

This patented powder is non-caustic, non-toxic and biodegradable. When mixed with water it produces a non-corrosive cleaning agent which allows for cleaning of most metals.

# 30-day Operating Cycle

The unit is drained, rinsed and refilled only once every 30 days. The solution is then easily drained with no spillage. This saves on water and detergent.

#### One-Touch Open/Close

The power-operated lid and basket open and close with the touch of a button.

## Basket-Within-Tank Design

Allows for items to be lifted above the water line for easy and safe loading and unloading. The basket rises and descends automatically with the lid.

#### Powerful Soaking Action

Removes burnt-on grease and carbon, and penetrates deep into corners and crevices with no scrubbing. Simply load and let the system do the work. The holding tank water is kept above 165° F and allows for overnight soaking.

## Easy to use

The cleaning process is simple. Load accessories, let them soak, remove and rinse.

#### Labor-Saver & Morale Booster

Less time spent scrubbing means more time for other tasks. It also eliminates a labor intensive job which will increase morale. The unit's ease of use makes it a snap to train on.

# Food Safety

Food safety is enhanced by thoroughly cleaning the items that come in contact with the food that is cooked.

# **Employee Safety**

Workers can use the equipment knowing they will avoid contact with hazardous chemicals.

#### Also Available

Electric Boilerless Ovens



Rotisserie Ovens




Island Hot Cases



Bread Roll Merchandiser



# CLEANING SOLUTION

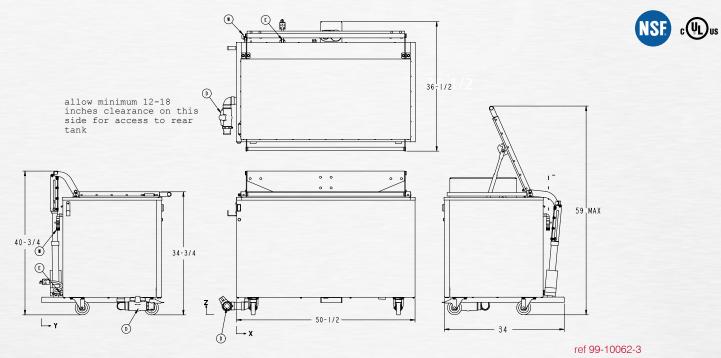

#### Installation

Connections	X Position	Y Position	Z Position	Description
Electrical (E)	13	5	6	120 VAC, 20A, 60Hz, SINGLE PHASE 8 FT POWER CORD WITH NEMA 5-20 PLUG INCLUDED
Water Inlet (W) Optional	2¾	4½	24	STANDARD 1" WASHING MACHINE HOSE CONNECTION
Drain (D)	-2 3/4	31¾	2½	ø1½ ID x 8 FT LONG REMOVABLE HOSE INCLUDED

#### **Notes**

- Water capacity is 67 gallons (255 L)
- Shipping weight is 610 lbs (277 Kg)
- Basket Internal Dimensions are: 44 <sup>1</sup>/<sub>4</sub>" L x 17 <sup>1</sup>/<sub>2</sub>" W x 10 <sup>3</sup>/<sub>4</sub>" H
- Basket capacity is not to exceed 125 lbs (57Kg)
- A floor drain should be located within 8 ft from the left side of the tank (position D)
- Easily accommodate a wide range of cooking utensils (such as rotisserie skewers and baskets) in its long, low basket.
- If optional water inlet is purchased (P/N -20506):
  - -A plumber should install a standard washing machine spigot on the wall close to the rear-left corner of the tank. This allows for a standard 1"x 6 ft long hose to be connected between the spigot and the tank
  - -A 4 ft quick disconnect water hose (P/N 5124) may also be purchased that uses <sup>1</sup>/<sub>2</sub>-NPT threaded connections
  - -The water supply may be cold or hot, the colder the water, the longer will be the initial heat up. Hot water is preferred